


**A DISPLAYPORT MALE**

**RoHS Compliant**


**DVI (24+1)P MALE**

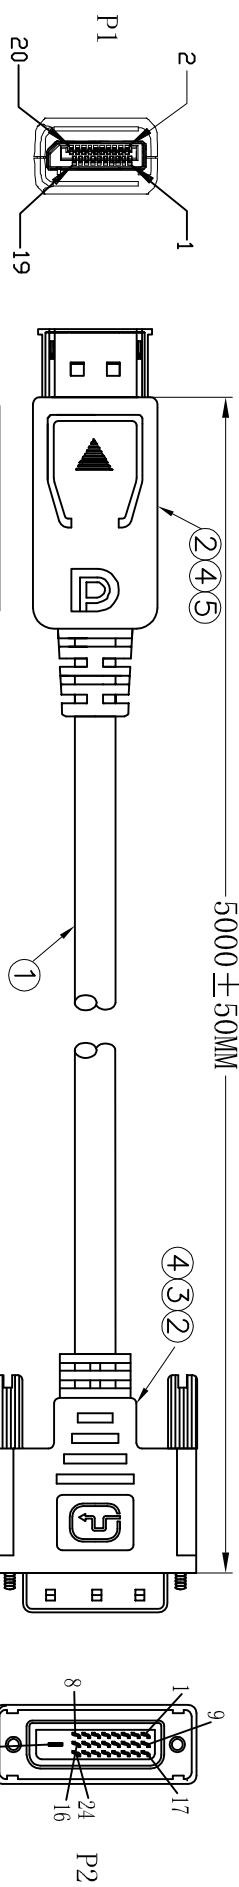

**Package Details**


**D Single Cable**

P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)
AK-340301-050-S	5m	150 mm max.	Ordinary Polybag (Heat Sealed)	240*160*0.05mm	0.343 kg




**E Inner Packing Unit**

P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)
AK-340301-050-S	5m	5 pcs	Polybag (Heat Sealed)	400*350*0.05mm	3.430 kg



**G CARTON DETAILS**


P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)
AK-340301-050-S	5m	30 pcs	50*32*21cm	10.3kg	11.4kg

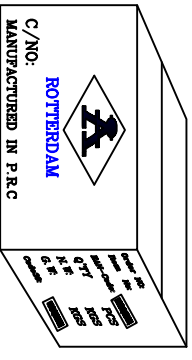

\* "ROTTERDAM" is for Sea Freight shipment  
 \* "COLOGNE" is for Air Freight shipment  
 \* "LUDENSCHIED" is for Fedex or UPS shipment

Drawn by	Date	Name
Checked by	Jun.02.2011	Libro
Approved by		

**ASSMANN**  
Electronic GmbH

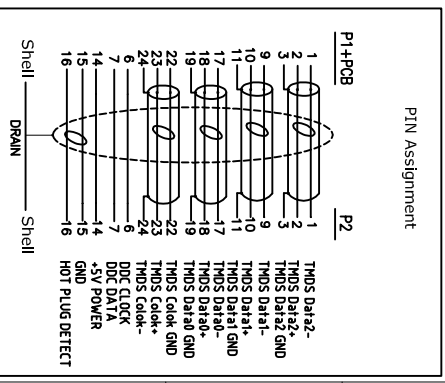

1

2

3

4

5

6

7

H

G

F

E

D

C

B

A

H

G

F

E

D

C

B

A