


1 2 3 4 5 6 7

SATA (7+15)P FEMALE

Rohs Compliant

500±20MM

SATA 7P FEMALE


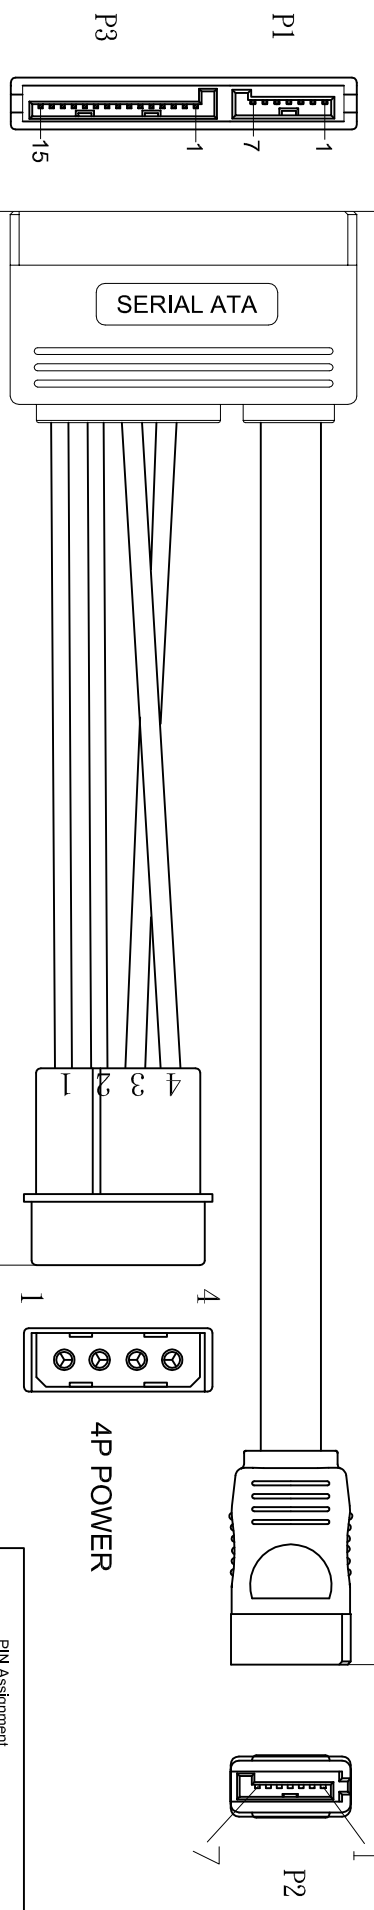


Package Details

P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)
AK-400112-005-R	0.5m	130mm max.	Ordinary Polybag (Heat Sealed)	230*140*0.05mm	0.030kg


Inner Packing Unit

P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)
AK-400112-005-R	0.5m	10 pcs	Polybag (Heat Sealed)	330*280*0.05mm	0.350kg

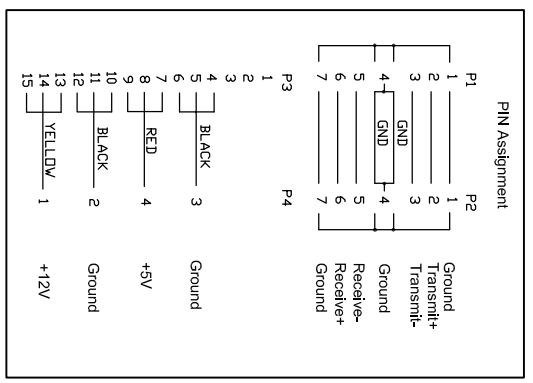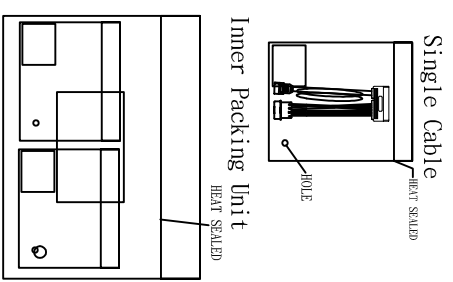

CARTON DETAILS

P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)
AK-400112-005-R	0.5m	3000pcs	41*34*26cm	10.4kg	11.2kg

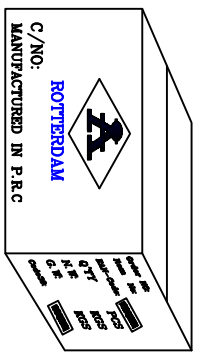

*"ROTTERDAM" is for Sea Freight shipment
 *"COLOGNE" is for Air Freight shipment
 *"LUDENSCHIED" is for Fedex or UPS shipment

Drawn by	Date	Nome
May.25.2011	Libro	
Checked by		
Approved by		

ASSMANN
 Electronic GmbH

Part No.
AK-400112-005-R
 EAN:4016032299783

Title
 SATA (7+15)P/F - SATA 7P/F + POWER CABLE

Scale	N/A	Sheet
Unit	MM	1/1

H	1	2	3	4	5	6	7	H																								
G	<table border="1"> <tr> <td colspan="2">CARTON DETAILS</td> <td colspan="2">CARTON DETAILS</td> <td colspan="2">CARTON DETAILS</td> <td colspan="2">CARTON DETAILS</td> </tr> <tr> <td colspan="2">P/N</td> <td colspan="2">Quantity (Carton)</td> <td colspan="2">Measurement (Carton)</td> <td colspan="2">N.W. (Carton)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">3000pcs</td> <td colspan="2">41*34*26cm</td> <td colspan="2">10.4kg</td> </tr> </table>							CARTON DETAILS		CARTON DETAILS		CARTON DETAILS		CARTON DETAILS		P/N		Quantity (Carton)		Measurement (Carton)		N.W. (Carton)		AK-400112-005-R		3000pcs		41*34*26cm		10.4kg		G
CARTON DETAILS		CARTON DETAILS		CARTON DETAILS		CARTON DETAILS																										
P/N		Quantity (Carton)		Measurement (Carton)		N.W. (Carton)																										
AK-400112-005-R		3000pcs		41*34*26cm		10.4kg																										
F	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Quantity (Inner Packing Unit)</td> <td colspan="2">Type (Inner Packing Unit)</td> <td colspan="2">Size (Inner Packing Unit)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">10 pcs</td> <td colspan="2">Polybag (Heat Sealed)</td> <td colspan="2">330*280*0.05mm</td> </tr> </table>							P/N		Quantity (Inner Packing Unit)		Type (Inner Packing Unit)		Size (Inner Packing Unit)		AK-400112-005-R		10 pcs		Polybag (Heat Sealed)		330*280*0.05mm		F								
P/N		Quantity (Inner Packing Unit)		Type (Inner Packing Unit)		Size (Inner Packing Unit)																										
AK-400112-005-R		10 pcs		Polybag (Heat Sealed)		330*280*0.05mm																										
E	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Cable Length</td> <td colspan="2">Rolling Size (Single Cable)</td> <td colspan="2">Polybag Type (Single Cable)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">0.5m</td> <td colspan="2">130mm max.</td> <td colspan="2">Ordinary Polybag (Heat Sealed)</td> </tr> </table>							P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)		AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)		E								
P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)																										
AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)																										
D	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Cable Length</td> <td colspan="2">Rolling Size (Single Cable)</td> <td colspan="2">Polybag Type (Single Cable)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">0.5m</td> <td colspan="2">130mm max.</td> <td colspan="2">Ordinary Polybag (Heat Sealed)</td> </tr> </table>							P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)		AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)		D								
P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)																										
AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)																										
C	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Cable Length</td> <td colspan="2">Rolling Size (Single Cable)</td> <td colspan="2">Polybag Type (Single Cable)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">0.5m</td> <td colspan="2">130mm max.</td> <td colspan="2">Ordinary Polybag (Heat Sealed)</td> </tr> </table>							P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)		AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)		C								
P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)																										
AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)																										
B	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Cable Length</td> <td colspan="2">Rolling Size (Single Cable)</td> <td colspan="2">Polybag Type (Single Cable)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">0.5m</td> <td colspan="2">130mm max.</td> <td colspan="2">Ordinary Polybag (Heat Sealed)</td> </tr> </table>							P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)		AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)		B								
P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)																										
AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)																										
A	<table border="1"> <tr> <td colspan="2">P/N</td> <td colspan="2">Cable Length</td> <td colspan="2">Rolling Size (Single Cable)</td> <td colspan="2">Polybag Type (Single Cable)</td> </tr> <tr> <td colspan="2">AK-400112-005-R</td> <td colspan="2">0.5m</td> <td colspan="2">130mm max.</td> <td colspan="2">Ordinary Polybag (Heat Sealed)</td> </tr> </table>							P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)		AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)		A								
P/N		Cable Length		Rolling Size (Single Cable)		Polybag Type (Single Cable)																										
AK-400112-005-R		0.5m		130mm max.		Ordinary Polybag (Heat Sealed)																										