

1

2

3

4

5

6

7







Signature	Revision History	Date	Rev.
LIBRA	For Bulk Production	June 30, 2011	01

Rohs Compliant

IEEE1394 6P MALE

IEEE1394 6P MALE

1800±30MM



P1



Single Cable

HEAT SEALED



P2


Package Details

Single Cable

P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)
AK-420101-018-S	1.8m	140mm max.	Ordinary Polybag (Heat Sealed)	230*130*0.05mm	0.125kg


Inner Packing Unit

P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)
AK-420101-018-S	1.8m	10 pcs	Polybag (Heat Sealed)	330*280*0.05mm	1.270kg




Inner Packing Unit

HEAT SEALED

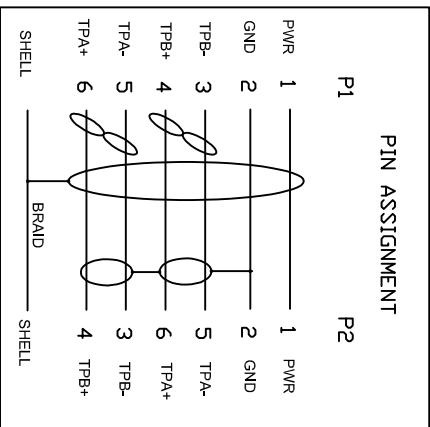

CARTON DETAILS

P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)
AK-420101-018-S	1.8m	110pcs	40*31*27cm	13.8kg	14.6kg



Drawn by	Date	Nome
Checked by	June 30, 2011	Libro
Approved by		

Part No. **AK-420101-018-S**
 EAN:4016032304395

ASSMANN
Electronic GmbH

IEEE1394A 6P/M - 6P/M CABLE

Title	Scale	N/A	Sheet
IEEE1394A 6P/M - 6P/M CABLE	Unit	MM	1/1

*"ROTTERDAM" is for Sea Freight shipment
 **"COLOGNE" is for Air Freight shipment
 *"LUDENSCHIED" is for Fedex or UPS shipment

STxxxxx

H

G

F

E

D

C

B

A

1

2

3

4

5

6

7

H

G

F

E

D

C

B

A