


RoHS Compliant


A DB 25P MALE

A DB 25P FEMALE

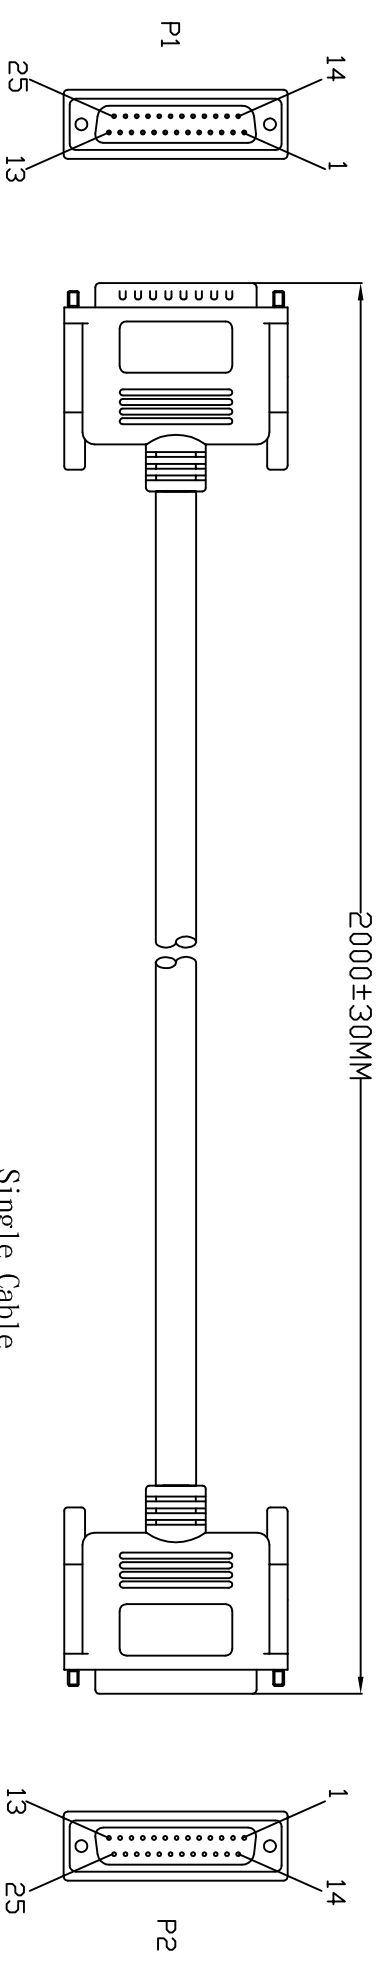


D Single Cable

P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)
AK-610201-020-E	2m	160mm max.	Ordinary Polybag (Heat Sealed)	280*150*0.05mm	0.240kg



E Inner Packing Unit


P/N	Cable Length	Quantity (Inner Packing Unit)	Type (Inner Packing Unit)	Size (Inner Packing Unit)	Weight (Inner Packing Unit)
AK-610201-020-E	2m	10 pcs	Polybag (Heat Sealed)	380*360*0.05mm	2.410kg



P1	P2	Pin Assignment
1	1	Protective Ground
2	2	Transmitted Data
3	3	Received Data
4	4	Request To Send
5	5	Clear To Send
6	6	Data Set Ready
7	7	Common Ground
8	8	Data Carrier Detect
9	9	RESERVED
10	10	RESERVED
11	11	Select Transmit Channel
12	12	Secondary Carrier Detect
13	13	Secondary Clear to Send
14	14	Secondary Transmit Data
15	15	Transmission Signal Data
16	16	Secondary Receive Data
17	17	Receiver Signal Element Timing
18	18	Local Loop Control
19	19	Secondary Request to Send
20	20	Data Terminal Ready
21	21	Remote Loop Control
22	22	Ring Indicator
23	23	Data Signal Rate Selector
24	24	Transmit Signal Element Trimming
25	25	Test Indicator
Shell	Shell	Drain

G CARTON DETAILS

P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)
AK-610201-020-E	2m	50pcs	40*30*30cm	12.6kg	13.5kg

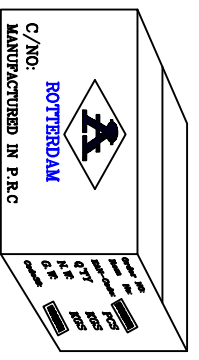

Drawn by	Date	Name
May.25.2011		Libro
Checked by		
Approved by		

ASSMANN
Electronic GmbH

Part No. **AK-610201-020-E**
EAN:4016032301196

Title
DB 25P/M - DB 25P/F CABLE

Scale	N/A	Sheet
Unit	MM	1/1

* "ROTTERDAM" is for Sea Freight shipment
* "COLOGNE" is for Air Freight shipment
* "LUDENSCHIED" is for Fedex or UPS shipment

STxxxxx

1	2	3	4	5	6	7
H	G	F	E	D	C	B