
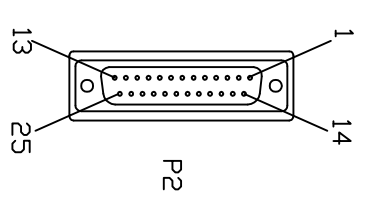
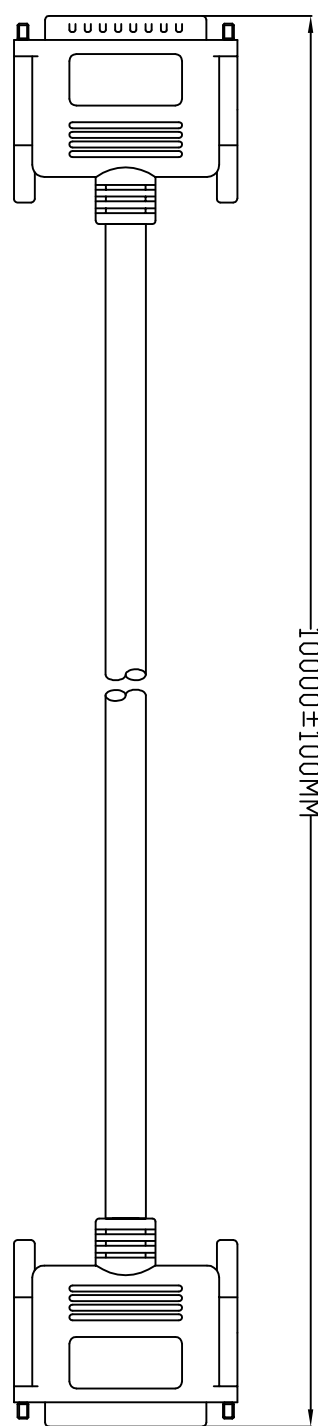


1 DB 25P MALE

RoHS Compliant

10000±100MM

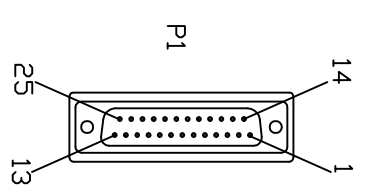


DB 25P FEMALE

Single Cable

Package Details

P/N	Cable Length	Rolling Size (Single Cable)	Polybag Type (Single Cable)	Bag Size (Single Cable)	Article Weight (Single Cable)
AK-610201-100-E	10m	200mm max.	Ordinary Polybag (Heat Sealed)	300*230*0.05mm	0.716kg


Single Cable



P1	P2	Assignment
1	1	Protective Ground
2	2	Transmitted Data
3	3	Received Data
4	4	Request To Send
5	5	Clear To Send
6	6	Data Set Ready
7	7	Common Ground
8	8	Data Carrier Detect
9	9	RESERVED
10	10	RESERVED
11	11	Select Transmit Channel
12	12	Secondary Carrier Detect
13	13	Secondary Clear to Send
14	14	Secondary Transmit Data
15	15	Transmission Signal Element Timing
16	16	Secondary Receive Data
17	17	Receiver Signal Element Timing
18	18	Local Loop Control
19	19	Secondary Request to Send
20	20	Data Terminal Ready
21	21	Remote Loop Control
22	22	Ring Indicator
23	23	Data Signal Rate Selector
24	24	Transmit Signal Element Timing
25	25	Test Indicator
Shell	Shell	Drain

CARTON DETAILS

P/N	Cable Length	Quantity (Carton)	Measurement (Carton)	N.W. (Carton)	G.W. (Carton)
AK-610201-100-E	10m	10pcs	40*30*20 cm	7.2kg	7.9kg

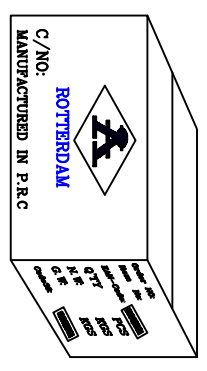

\*\*"ROTTERDAM" is for Sea Freight shipment  
 \*\*"COLOGNE" is for Air Freight shipment  
 \*\*"LUDENSCHIED" is for Fedex or UPS shipment

Drawn by	Date	Nome
May.25.2011		Libro
Checked by		
Approved by		

Part No.	AK-610201-100-E
EAN:4016032301448	

ASSMANN

Electronic GmbH

Title	DB 25P/M - DB 25P/F CABLE
Scale	N/A
Unit	MM
Sheet	1/1

A	B	C	D	E	F	G	H
---	---	---	---	---	---	---	---