



DIGITUS® CAT 6 U-UTP twisted pair patch cable

4x2xAWG24 U-UTP CAT 6 250 MHz patch cable
 Suitable for direct assembly of RJ45 plugs for the manufacture of patch cables.
 For installation of cable lines of class E, 250 MHz.
 Conforming to ISO/IEC 11801, DIN EN 50173, DIN EN 50288-6-2

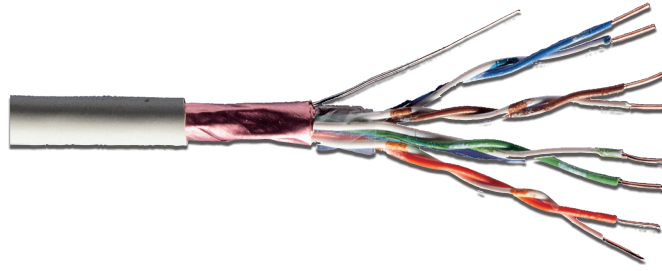

Physical Description

Basic Conductor	stranded AWG 24/7
Insulation	PE
Total number of insulated conductors	8, twisted in 4 pairs
Color code	blue x white, orange x white, green x white, brown x white
Individual pair shield	none
Overall shield	none
Outer jacket	PVC
Color	grey

Electrical Properties

DC loop resistance	≤ 175.2Ω/ km
Resistance unbalance	≤ 2%
Insulation resistance (500 V)	≥ 2000MΩ *km
Capacitance at 800 Hz	nom. 48 nF/km
Capacitance unbalance (pair to ground)	≤ 1500 pF/km
Characteristic impedance (1-100 MHz)	(100 ± 15) Ω
Nominal velocity of propagation	approx. 67 %
Propagation delay	Nominal ≤ 535 ns/100m
Delay skew	Nominal ≤ 45 ns/100m
Test voltage (DC, 1 min) Core/Core	1000 V
Coupling attenuation	≥ 40 dB

Transmission Properties

FREQ. MHz	Absorbability dB/100m	NEXT dB	PS NEXT dB	ACR dB/100m	PS-ACR dB/100m	ACR-F dB/100m	PS ACR-F dB/100m	Return loss dB
	Typ	Typ	Typ	Typ	Typ	Typ	Typ	Typ
1	3	60,0	57,0	57,0	54,0	57,4	54,4	17,0
4	4,5	53,5	50,5	49,1	46,1	45,4	42,4	17,0
8	6,3	48,6	45,6	42,3	39,3	39,3	36,3	17,0
40	7,1	47,0	44,0	39,9	36,9	37,4	34,4	17,0
16	9,1	43,6	40,6	34,5	31,5	33,3	30,3	17,0
20	10,2	42,0	39,0	31,8	28,8	31,4	28,4	17,0
25	11,4	40,3	37,3	28,9	25,9	29,4	26,4	16,0
31,25	12,9	38,7	35,7	25,9	22,9	27,5	24,5	15,1
62,5	18,6	33,6	30,6	15,0	12,0	21,5	18,5	12,1
100	24	30,1	27,1	6,1	3,1	17,4	14,4	10,0

186434 / DK-1521-P-1

100m ring, CAT 5e F-UTP Twisted Pair Patch Cable

202271 / DK-1521-P-305

305m ring, CAT 5e F-UTP Twisted Pair Patch Cable