



Signature	Revision History	Date	Rev.
G. CHEN	Release DIGITUS drawing format	Feb.24.2010	01



P1

P2

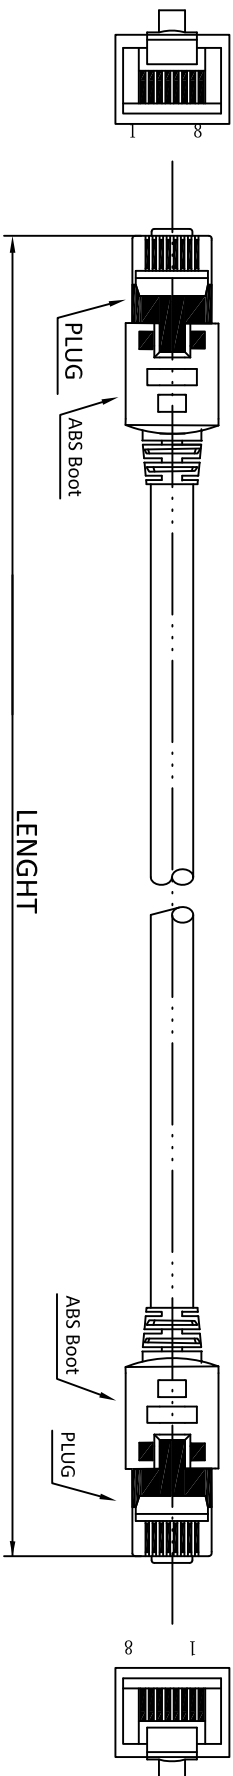

LENGHT

Printing: DIGITUS CAT 6a Class Ea S-FTP Patch cord AWG 26 4P LSOH 10Gbit Ethernet
ISO/IEC 11801 ED.2 EN-50288 ANS/ EIA/TIA-568-B.2-10 IEC 60332.1-2 WWW.DIGITUS.INFO


PIN ASSIGNMENT

PA/R	P1	(T568B)	P2	(T568B)
1	1	WHT/ORG	1	WHT/ORG
2	2	ORG	2	ORG
3	3	WHT/GRN	3	WHT/GRN
4	4	GRN	4	GRN
5	5	BLU	5	BLU
6	6	WHT/BLU	6	WHT/BLU
7	7	WHT/BRN	7	WHT/BRN
8	8	BRN	8	BRN


DK-1641-A-XXX

For CAT. 6a Cable

For Cable Length

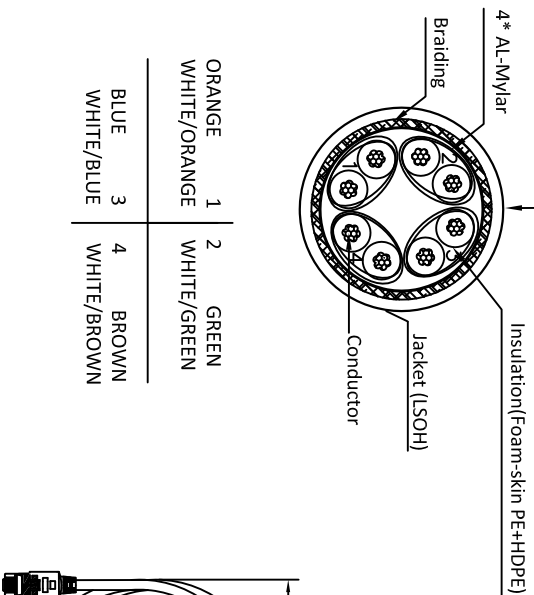

ORANGE	1	GREEN	2
WHITE/ORANGE	2	WHITE/GREEN	3
BLUE	3	BROWN	4
WHITE/BLUE	4	WHITE/BROWN	



CONDUCTOR	BARE COPPER 26AWG 7/0.15±240.005MM	WIRES	CAT6a S/FTP PIMF STRANDED WIRES 26AWG*4P
BRAIDING	TINNED COPPER (0.1MM 16/5)	PLUG	RJ45 898C PLUG ASSEMBLED WITH BOOT
INSULATION	THICKNESS:MIN AT ANY POINT: 0.20MM MAX AVERAGE: 0.35MM Ø: 1.03±0.05MM	LENGTH	XX M
JACKET LSOH	THICKNESS: MIN AT ANY POINT: 0.46MM MAX AVERAGE: 0.55MM Ø: 6.1±0.2MM	JACKET COLOR	PANTON COOL GREY 4C

Drawn By	Feb-24-2010	G.Chen
Checked By	Feb-24-2010	Kevin.N
Approved By		

Part No. **DK-1641-A-XXX**

Title:

DIGITUS PATCH CABLE CAT 6a S/FTP PIMF
AWG26 STRANDED WIRES LSOH GREY



Scale	N/A	Sheet	1/1
Unit	MM		

STR2526

1 2 3 4 5 6 7

A B C D E F G H