



# HDMI VIDEO EXTENDER




**Quick Installation Guide**  
**DS-55400**


1. First check product packaging, including: main unit Sender, main unit Receiver, one power adapter (48V 1A), IE, IR, User's manual; other devices should be prepared: Hi-Def source, HDTV, two HDMI Cables, one Hi-Q Cat5e/6 Cable with Shielding.




2. Connect a Hi-Def source to the Sender with a user-supplied HDMI cable. Connect the HDTV to the Receiver.

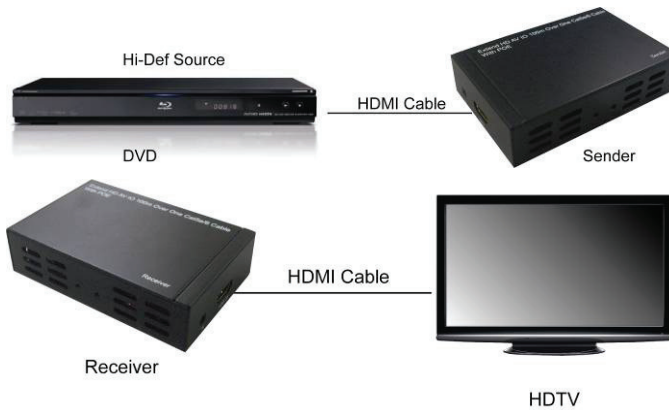

3. Connect the plug of included locking IE to the Sender and place the head nearly the source IE window.

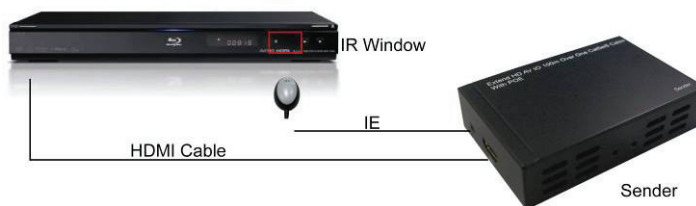

4. Connect the plug of included locking IR to the Receiver and place the head nearly the HDTV.

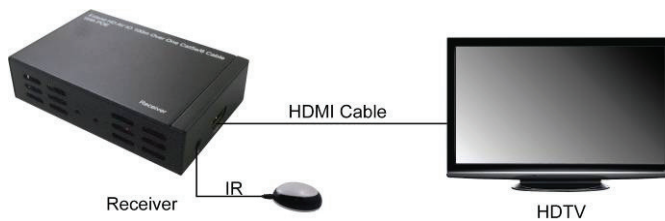

- Connect a cat5e/6 network Cable to the Sender and connect the opposite end of the network cable to the Receiver.



- Put the plug of the power strip into the wall socket and then plug the other side of the power adapter to the Sender (the Receiver doesn't need power supply).



- Turn on the Hi-Def source, HDTV, the Sender and the Receiver.



- After the Sender and Receiver have been properly calibrated, the Hi-Def video and audio whose content is from source will Play on HDTV immediately.



- If want to control the source, you can use the remote control of source device to send commands subject to IR on the Receiver back to the source to navigate, select and playback the content stored on your source at the far-end device HDTV side.

