


# 1D Wireless Barcode Scanner User Manual



Version (Customized)

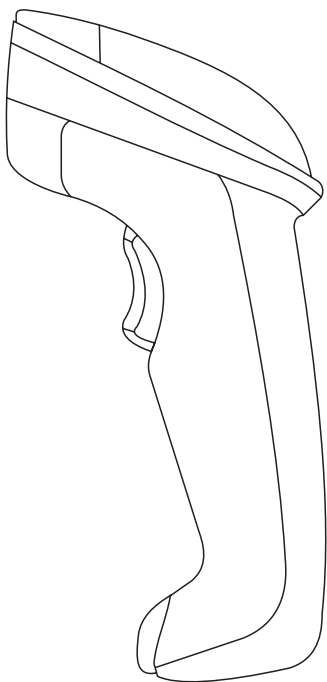

Power Off

(Note: Scan this barcode, scanner will make a long beep, then power off)

V1.1

## Introduction

This barcode scanner provides a precise and complete solution with easy-using, fast data-recording and saving for computer information system. The scanner supplies three scanning mode: Button-trigger mode, Auto-continuous mode and Auto-flash mode, and the default one is Button-trigger mode.

This is a easily user manual for this scanner, if you need more details about how to use, please get the manual from distributors, or download from our official website



Factory Default



Forced Pairing

## One scanner pair with one receiver

1. Scan "Factory Default"



2. Pull and plug receiver to PC

3. When red indicator light of DATA in receiver flashing continuously, to scan "Forced Pairing", this step will clear away the previous pairing, and finish the present pairing, after pairing succeed, the scanner will make two sounds of "Beep"



Note: After pairing succeed, the red indicator light of DATA in receiver will flash (about 1time/sec), then open a text to scan needed barcode, in this case red light flash too, and the data can be seen in the text.

## Data Saving Setting



Inventory Mode



Upload all data and cleared

(Note: Upload all data stored and clear them)



Upload all data and no cleared

(Note: Upload all data stored but do not clear them)



Upload one data and cleared

(Note: Upload one data stored and clear it)



Upload one data and no cleared

(Note: Upload one data stored but do not clear it)



Display the number of barcode to be uploaded



Clear



Quit Inventory Mode

## Scanning Mode



Button Trigger Mode (Default)



Auto-Continuous Scanning Mode



Auto-Flashing Mode

## Auto-Induction



ON



OFF

## Buzzer



Sound On (Default)



Sound Off



Sound Louder



Sound Lower



Successful data upload indicate (one beep)  
(Note: There is one beep after data uploaded succeed)



Successful data upload indicate (two beeps)  
(Note: There is two beeps after data uploaded succeed)

## Keyboard Mode

### Language Choice




USA (Default)



Germany



France

 Keyboard Caps Lock Control



Capitalize



Lower Case



Case Swap



None

**Suffix Setting**



CR



CR & LF



None

**Shock Setting**



Enable



Disable

**Symbologies Selection**



Enable CODE-39



Disable CODE-39



Enable FULL ASCII



Disable FULL ASCII



Enable UPC-A



Disable UPC-A



Enable UPC-E



Disable UPC-E



Enable EAN-13



Disable EAN-13



Enable EAN-8



Disable EAN-8



Enable CODE-93



Disable CODE-93



Enable CODE-128



Disable CODE-128



Enable CODEBAR



Disable CODEBAR



Enable Interleaved 2 of 5



Disable Interleaved 2 of 5



Enable Industrial 2 of 5



Disable Industrial 2 of 5



Enable MSI



Disable MSI



Enable CODE-11



Disable CODE-11



Enable Matrix 2 of 5



Disable Matrix 2 of 5



Enable Postal 2 of 5



Disable Postal 2 of 5



Enable Aviation 2 of 5



Disable Aviation 2 of 5



Enable GS1 Omnidirectional



Disable GS1 Omnidirectional



Enable GS1 Limited



Disable GS1 Limited